

### Mounting base for power supplies



- For ATX
- Attaches to the subrack side panel


#### Material

2 mm Aluminium  
Clear-chromated

#### Supply includes

Assembly parts

Width (B) mm	Depth (T) mm	Order No.
431.8	100	<b>3684.323</b>
431.8	130	<b>3684.324</b>

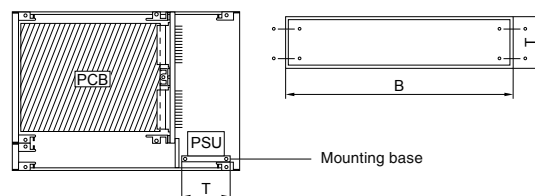

### Female connector type M24/8



#### IEC 60 603-2

- Female connector for plug-in CPCI power supplies
- Quality level 2 to IEC 60 603-2 (DIN 41 612)
- Optional 20 A high current contacts for straight conductor connection either crimp or solder
- Volume resistance max. 1.5 mΩ
- Max. rated current: 40 A

#### Supply includes

5 connection sockets (crimping or soldering method)

Type of connection	Packs of	Order No.
Soldering	1 set	<b>3687.665</b>
Crimping	1 set	<b>3687.666</b>

#### + Also required

For mounting in the subrack, a Z rail is required see page 144