


HeiPac Vario HEAVY 3 U, 6 U

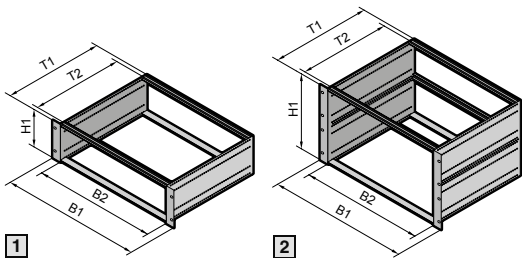

Material/surface finish

Side panels: 2.5 mm Aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 Flanges: Extruded aluminium section, clear-chromated

Supply includes


Side panels, flanges, horizontal rails, threaded inserts, assembly screws

Tests

Shock and vibration tested in accordance with:
 DIN EN 61587-2
 EN 50 155

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3.

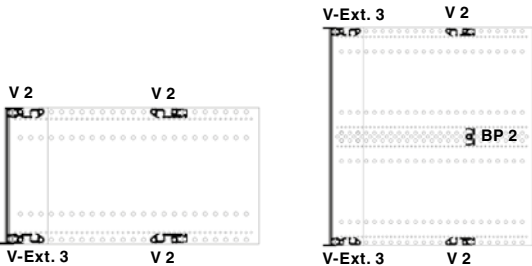

			Order No. without handle holes		Order No. with handle holes	
			1	2	1	2
U			3	6	3	6
Height (H1) mm			132	265.35	132	265.35
HP			84	84	84	84
Side panel (T1) mm	T2 mm	Max. PCB depth mm				
245	220	160	9921.860	9921.862	9921.864	9921.866
305	280	220	9921.861	9921.863	9921.865	9921.867

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0