



# RES3000

## Rugged Fully Managed Ethernet Switch Family

The RES3000 is a family of High Performance Fully Managed Layer 2/3+ Standalone Rugged 1GbE and 10GbE Switches. Switch configurations include twelve (12) 1000BaseT ports, twenty-four (24) 1000BaseT ports, and twenty-four (24) 1000BaseT ports plus four (4) 10GigE ports. The product family is highly configurable allowing additional configuration options to be accommodated. The RES3000 products support wire speed switching of L-2 and L-3 packets including IPv6 switching and routing.

The RES3000 rugged design allows it to meet the needs of a wide range of challenging MIL/AERO environments. For example the products are switch compatible with the new VICTORY initiative by the United States Army. The RES3000 high speed network capability via the 10GbE links makes it ideal for applications such as situational awareness, imaging, and sensor data. In addition, all models are size, weight and power (SWaP) optimized allowing them to be used in areas where space is at a premium and available power is restricted.

Proven, high-performance architecture and a multilayer switching fabric provides a rich feature set, broad functionality, scalability, and product life longevity. Based on a switch fabric with an integrated ARM management processor, the RES3000 has wire-speed Layer 2/3 switch capabilities as well as the ability to support higher Layer 4-7 functionality when required.

The switch management environment for the RES3000 is our in-house developed and supported OpenWare™. OpenWare offers comprehensive management features for Layer 2/3 switching and routing. There is support for a wide range of RFC's and MIB's with extensive capabilities for Multicast, Quality of Service, VLANs, and Differentiated Services. In addition, OpenWare™ is VICTORY switch compliant and can be modified to meet particular customer requirements.

The RES3000 has built-in-test capability including Power-On-BIT, Continuous BIT and Initiated BIT. In addition precision time protocol 1588v2 transparent clock functionality is supported to enable local synchronization.

### FEATURES:

- VICTORY switch compliant
- Three models ranging from twelve (12) 1000BaseT ports up to twenty-four (24) 1000BaseT plus four (4) 10GBASE-SR ports
- Rugged design to support deployment in harsh environments.
  - Size, Weight and Power (SWaP) Optimized
  - Convection and conduction cooled capable
  - MIL-STD-704F compliant
- Fully managed Layer 2/3
- Wire speed switching and routing of L-2 and L-3 packets (including IPv6)
- L-3 protocol support including OSPF, RIP and VRRP
- OpenWare™ Switch Management software
- Multicast Support: IGMP Snooping Querier
- Allows up to 4096 VLANs
- Built in Test (BIT)
- Sanitization capability
- 1588v2 precision time protocol support
- Denial of Service attack prevention
- Out of Band Management port
- RS232 serial console
- MIL-D38999 series 3 connectors
- -40°C to +71°C operating temperature
- Meets a wide range of MIL-STD-810G and MIL-STD-461G specifications

### KEY SPECIFICATIONS

- IEEE 802.3-2005
- IEEE 802.1D (Prioritization)
- IEEE 802.3ad (Link aggregation)
- IEEE 802.1Q (VLAN tagging)
- IEEE 802.1Q-2005 (Multiple Spanning Tree)
- IEEE 802.1X (Port Authentication)
- IEEE 802.3az Energy Efficient Ethernet
- IETF RFC 4541 (IGMP & MLD Snooping)
- RoHS 2011/65/EC compliant

## RES3000 *Rugged Fully Managed Ethernet Switch Family*

### OpenWare Management Software

OpenWare™ is available exclusively on selected NETernity fully-managed Layer-2/3 Ethernet switches. Comprehensive and powerful, this switch management environment provides integrated management services including configuration, monitoring, switching control, addressing, routing and all supported protocols. Configuration and monitoring functions are accessible from a serial console or via a network. Supported access methods include Telnet, SSH, Web and SNMP.

#### OpenWare features:

- IPv6 support for improved security, reliability and flexibility, enhanced support for mobile computing devices, and larger address space for global reach and scalability. IPv4 is also supported offering a path forward which protects existing investments.
- Easy deployment and management that results from the wide range of protocols supported. These protocols are defined by RFCs, and cover a range of operations: Switch, VLANs, Aggregation, Multicast, Filtering, Routing, QoS, and Management. NETernity switches with OpenWare support a wide range of network communications capability.
- OpenWare makes use of Linux® based software to allow faster implementation and easy updates to firmware as part of standard releases or when customization is required. Customizations may be leveraged across all NETernity/ OpenWare platforms. Standard Linux commands may be used as well as open source protocol and routing capabilities.
- Using a combination of open source protocol software and OpenWare allows us in certain instances to provide full software source to customers. Additionally, full control over the software environments permits customization for specific requirements such as customer-specific handling of failover conditions.

### Switch Fabric and OpenWare Protocol Features

- Supports both Layer-2 (L2) and Layer 3 (L3) packet switching. Packets are categorized by the MAC addresses for L2 switching and by IP addresses for L3 switching.
- QoS prioritization (IEEE 802.1D) permits classifying packet priorities which is beneficial in delay-sensitive applications.
- Packet filtering to prevent forwarding of certain packets; filtering capabilities are available in Layers 2 - 7.
- Link aggregation (IEEE 802.3ad) links a group of physical ports creating a single logical port to provide higher bandwidth and increase redundancy between switches. The fabric is capable of full wire speed switching, allowing a maximum aggregate throughput that is the sum of all aggregated ports.
- Virtual LANs (VLANs) (IEEE 802.1Q) defines a forwarding (switching) domain; supports up to 4096 VLANs.
- Multiple Spanning Tree Protocol (MSTP) (IEEE 802.1Q) enables automatic and rapid determination of an optimal loop-free topology from an arbitrary network of enabled switches with duplicate and redundant connections; supports rapid reconfiguration in the event of a link or switch failure; backward compatible with RSTP and STP.
- Broadcast storm control screens excessive traffic and controls the rate limit for each port and prevents flooding in the network.
- IGMP snooping permits the switch to monitor IGMP interactions between hosts and routers and to adjust its forwarding tables accordingly resulting in more efficient bandwidth use.
- Port mirroring eases debug and packet pattern study. This is a method to observe on one port traffic that is flowing on another port.

### L-3 IP Routing Protocols

- OSPF (Open Shortest Path First), a flexible link state protocol, tests the state of links and transmits that information throughout the system to establish the shortest path to the destination. This protocol also load balances by distributing traffic equally among routes. Messages may also be routed based on the type of service so that critical messages can transverse the most reliable routes.
- RIP (Routing Information Protocol), an easy- to-configure, dynamic routing protocol, allows routers to exchange information for computing routes through networks. Routing tables are used to store destination and metric pairs.
- VRRP (Virtual Router Redundancy Protocol) eliminates single points of failure on a network. Using an election protocol to provide failover for forwarding packets, VRRP provides a higher availability default path.



## RES3000 *Rugged Fully Managed Ethernet Switch Family*

### Specifications

#### Physical Interface

- Twelve (12) 1000BaseT ports, or Twenty-four (24) 1000BaseT ports, or Twenty-four (24) 1000BaseT ports plus four (4) 10GBASE-SR ports
- Communications Port and Power connections

#### Full wire speed performance

- Switch does not 'bottleneck' network performance

#### 16K MAC address table

- Automatically learns network connections

#### Bandwidth Provisioning

- Guaranteed bandwidth for real-time services

#### Front Panel Connectors

- MIL-D38999 Series 3
- Mechanically keyed to be unique
- Chassis Mounting Point

#### Weights

- RES3000-FH1X10XXX 2.0kg / 4.4lbs
- RES3000-FH1X20XXX 3.0kg / 6.6lbs
- RES3000-FH1X2411X 3.1kg / 6.8lbs

#### Power

- RES3000-FH1X10XXX 15 Watts
- RES3000-FH1X20XXX 20 Watts
- RES3000-FH1X2411X 24 Watts

#### Environmental

- Operating Temp: -40°C to +71°C per MIL-STD-810G Method 501.5 and 502.5
- Storage Temp: -50°C to +100°C per MIL-STD-810G Method 501.6 Procedure I
- Functional Shock: 40g peak terminal peak sawtooth, 11ms duration per MIL-STD-810G Method 516.6
- Vibration: Random, from 15 to 2000Hz per MIL-STD-810G w/Change 1 Method 514.7 Procedure I, Figure 517.7D-1 (all other material), Category 12 - Fixed wing aircraft - Jet aircraft ( $W_0 = 0.1 \text{ g}^2/\text{Hz}$ )
- Humidity: Up to 95% RH with varying temperature; 10 cycles, 240 hours per MIL-STD-810G Method 507.5 Procedure II (aggravated) Low Pressure (altitude): Functional at up to 50,000ft altitude and RTCA DO-160F, sec 4.5
- Decompression: 8,000 to 50,000ft in under 15 seconds per RTCA DO-160F, section 4.6.2
- Rain Water: MIL-STD-810G Method 506.5, Procedure II – exaggerated
- Overpressure: -15,000ft per RTCA DO-160F, Section 4.6.3
- Salt fog: Mist with 5% salt solution for 2x 24 hour cycles per MIL-STD-810G Method 509.5
- Blowing Sand: 2.2g/m<sup>3</sup> concentration at 18m/s per MIL-STD-810G, Method 510.5 Procedure II
- MIL-STD-461G EMI/EMC specifications including CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101 and RS103
- MIL-STD-704D aircraft electric power characteristics

#### Dimensions

- RES3000-FH1X10XXX:  
148mm (W) x 86mm (H) x 131mm (L)
- RES3000-FH1X20XXX:  
244mm (W) x 86mm (H) x 131mm (L)
- RES3000-FH1X2411X:  
244mm (W) x 86mm (H) x 131mm (L)

#### Mean Time Between Failure (MTBF) for Ground Benign, 30 degrees C environment:

- RES3000-FH1X2411X 196,551 hours
- RES3000-FH1X20XXX 461,854 hours
- RES3000-FH1X10XXX 557,912 hours


### Ordering information

RES3000-FH1X10XXX	Fully Managed Rugged Ethernet Switch with 12 1000BaseT ports and Power Supply
RES3000-FH1X20XXX	Fully Managed Rugged Ethernet Switch with 24 1000BaseT ports and Power Supply
RES3000-FH1X2411X	Fully Managed Rugged Ethernet Switch with 24 1000BaseT and four (4) 10GBASE-SR ports and Power Supply
RES3000C1-91A	12 1000BaseT ports I/O Cable Kit for UK
RES3000C1-92A	12 1000BaseT ports I/O Cable kit for US
RES3000C1-93A	12 1000BaseT ports I/O Cable kit for EU
RES3000C1-91B	24 1000BaseT ports I/O Cable kit for UK
RES3000C1-92B	24 1000BaseT ports I/O Cable kit for US
RES3000C1-93B	24 1000BaseT ports I/O Cable kit for EU
RES3000C1-91C	24 1000BaseT ports and 4 10GBase-SR ports I/O Cable kit for UK
RES3000C1-92C	24 1000BaseT ports and 4 10GBase-SR ports I/O Cable kit for US
RES3000C1-93C	24 1000BaseT ports and 4 10GBase-SR ports I/O Cable kit for EU



# RES3000 Rugged Fully Managed Ethernet Switch Family

## Diagram

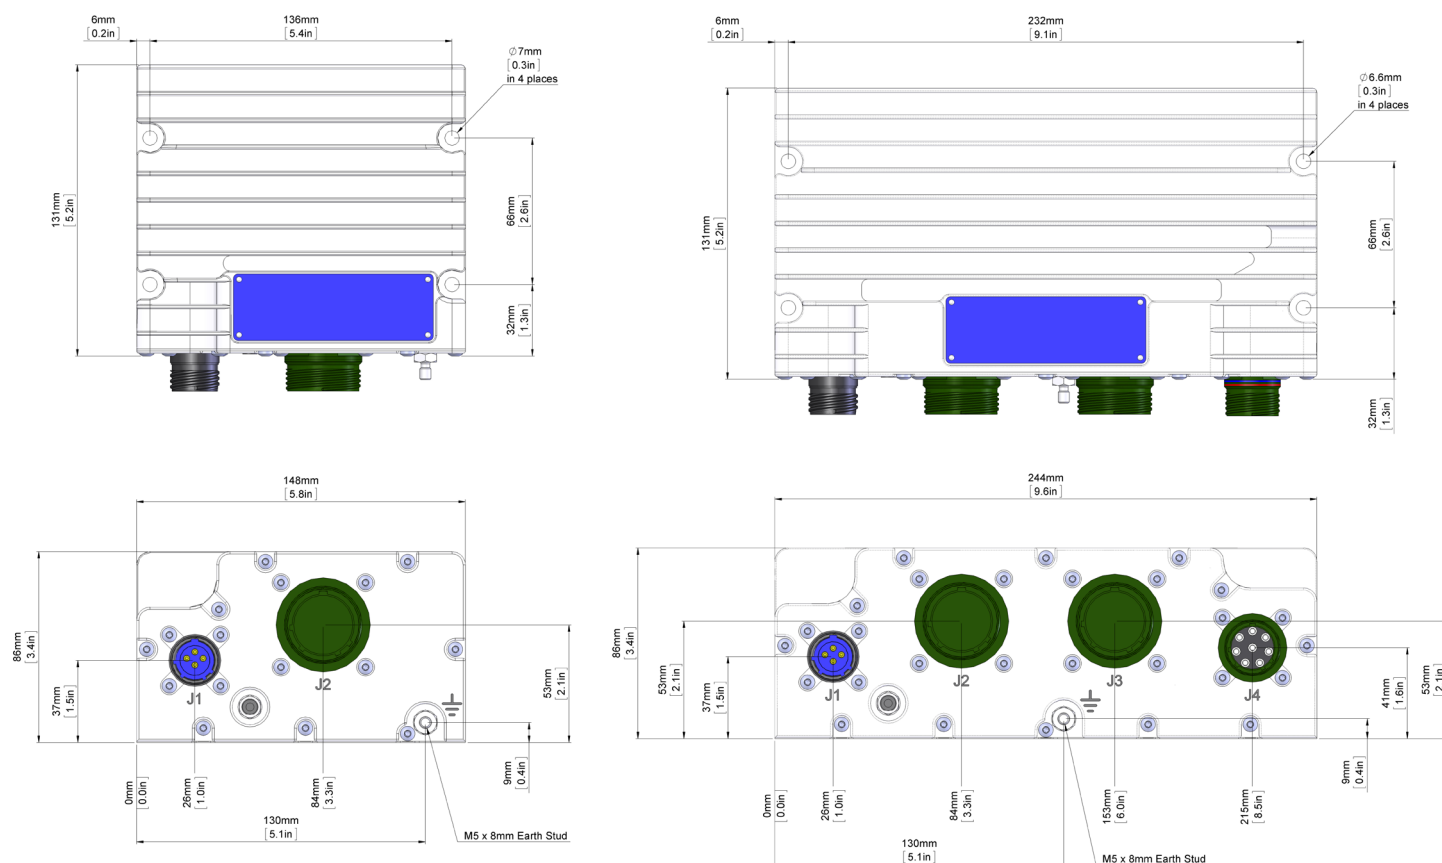

WE INNOVATE. WE DELIVER. YOU SUCCEED.

Americas: 866-OK-ABACO or +1-866-652-2226 Asia & Oceania: +81-3-5544-3973

Europe, Africa, & Middle East: +44 (0) 1327-359444

Locate an Abaco Systems Sales Representative visit: [abaco.com/products/sales](http://abaco.com/products/sales)

[abaco.com](http://abaco.com) | @AbacoSys

©2017 Abaco Systems. All Rights Reserved. All other brands, names or trademarks are property of their respective owners. Specifications are subject to change without notice.

