


# IGS-5408GSFP

8 10/100/1000T + 4 1000M SFP L2+ Industrial Managed Switch w/ Enhanced

## G.8032 Ring

- *Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode, enhanced mode, train mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8/16\* MSTI /RSTP*
- *Miss-wiring avoidance & Repowered auto ring restore (node failure protection)*
- *User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values\*\*\*; Complete CLI*
- *Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82 for Port/VLAN based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3, IPv6, SMS*
- *Environmental Monitoring for temp., voltage & current\*\**
- *USB slot for edited restoration and auto backup*

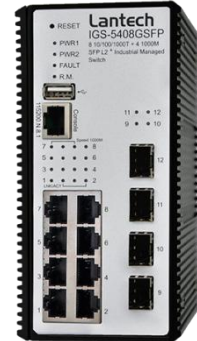

## OVERVIEW

Lantech IGS-5408GSFP is a high performance L2+ (Gigabit uplink) switch with 8 10/100/1000T + 4 1000M SFP which provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms including train ring, enhanced mode for easy configuration, comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ\* (double tag VLAN) which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscosworks to detect the switch info and show on L2 map topology.

Lantech IGS-5408GSFP has RTC (Real Time Clock) inside that can keep track of current time.

The IGS-5408GSFP also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IGS-5408GSFP is able to alert with the LED indicator and send out an email, traps or a SMS text. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

DHCP option 82 and relay agent function (port/vlan based DHCP distribution) can offer the same IP address on port base or vlan base where there is need to replace the new device connecting to Lantech switches to avoid any network disruption. The built-in DHCP Option 82 server offers the convenience of policy setting on the switch. Mac based DHCP server function assigns an IP address according to its MAC address to include dumb switches in DHCP network.

The user friendly UI, innovative auto topology drawing and topology demo makes IGS-5408GSFP much easier to get hands-on. The switch also equips the RTC (real time clock) which can keep track of time always. The IGS-5408GSFP supports DMI interface that can correspond with DDM SFPs (Digital diagnostic monitor) to display the five parameters in Lantech's UI, including optical output power, input power, temperature, laser bias current and transceiver supply voltage\*\*\*. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI enables professional engineer to configure setting by command line.

Lantech IGS-5408GSFP features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under enhanced ring), train ring, basic ring by easy setup than others. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows RSTP over Vlan for redundant links with 8/16\* MSTI.

The configuration file of Lantech IGS-5408GSFP can be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. The factory reset button can restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead. The USB slot allows user to backup/ restore configuration.

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

The IGS-5408GSFP DIDO function can support additional open/close physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the switch was moved or stolen. In case of events, the IGS-5408GSFP will immediately send an email & SMS text message to pre-defined addresses as well as SNMP Traps out. It provides 2DI and 2DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and

traps.

The optional environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps, email and SMS alert when abnormal.

The Lantech IGS-5408GSFP is designed with dual power supply at 24/48VDC or single power supply at 90~305VAC/120~430VDC. Featured with relay contact alarm function, the IGS-5408GSFP is able to connect with alarm system in case of power failure. The IGS-5408GSFP also provides  $\pm 2000V$  EFT and  $\pm 6000V$  ESD protection, which can reduce unstable situation caused by power line and Ethernet.

Lantech IGS-5408GSFP features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.


## FEATURES & BENEFITS

- **8 10/100/1000T + 4 1000M SFP (Total 12 Ports Switch)**
- **Back-plane (Switching Fabric): 24Gbps**
- **16K MAC address table**
- **DDM to support SFP diagnostic function\*\*\***
  - *Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance*
- **10KB Jumbo frame supported on all ports**
- **User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting**
- **Enhanced G.8032 Ring protection in 20ms < 256 switches**
  - *Support various ring/chain topologies, including train ring*
  - *Enhanced G.8032 ring configuration with ease*
  - *Auto ring configuration(auto mode) for single ring*
  - *Ring covers multicast on different ports*
- **Dual DC input from 18V~57VDC, HV model with single 90~305VAC or 120~430VDC power input**
- **Provides EFT protection  $\pm 2000$  VDC for power line.**
- **Supports  $\pm 6000$  VDC Ethernet ESD protection**
- **LACP load balancing to distribute the load\***
- **Built-in RTC (Real Time Clock) to keep track of time**
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy**
- **4K 802.1Q VLAN, Port based VLAN, GVRP\*\*, QinQ\***
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console/ Lantech™ InstaConfig\*\*/ Lantech™ InstaView\*\***
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server for Port/Vlan based DHCP distribution; DHCP Option 66**
- **Mac based DHCP server to assign IP address that includes dumb switches in DHCP network**
- **Bandwidth Control**
  - *Ingress packet filter and egress rate limit*
  - *Broadcast/multicast packet filter control*
- **Relay alarm output system events**
- **Miss-wiring avoidance**
  - *LED indicator*
  - *Email, traps, or SMS notification*
- **Repowered auto ring restore**
  - *Ensure the switches in a ring to survive after power breakout is back*
  - *The status can be shown in NMS when each switch is back*
- **TFTP/HTTP firmware upgrade; Lantech™ InstaConfig\*\* for multiple upgrade; USB for edited restoration and auto backup**
- **System Event Log, SMTP Email alert, SMS mobile (text) and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
  - *SSL/SSH/INGRESS/EGRESS ACL L2/L3*
  - *Port Security: MAC address entries/Filter/MAC-Port binding*
  - *IP Security: IP address security management to prevent unauthorized intruder.*
  - *Management access control with priority*
  - *Login Security: IEEE802.1X/RADIUS*
  - *HTTPS for secure access to the web interface*
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **Multicast static route for non- IGMP camera to prevent flooding; IGMP router port to assign query in ring and for reversed multicast video flow**
- **Multicast VLAN registration\* for metro video**
- **IGMPv1,v2,v3 with Query mode for multimedia;**


- **GMRP\***
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch CPU is found dead**
- **Optional environmental monitoring for system input voltage, current, ambient temperature**
- **Supports DIDO (Digital Input/Digital Output)**
- **IP30 metal housing with DIN rail and Wall-mount\*\* design**

**DIMENSIONS (unit=mm)**

**Standard model**

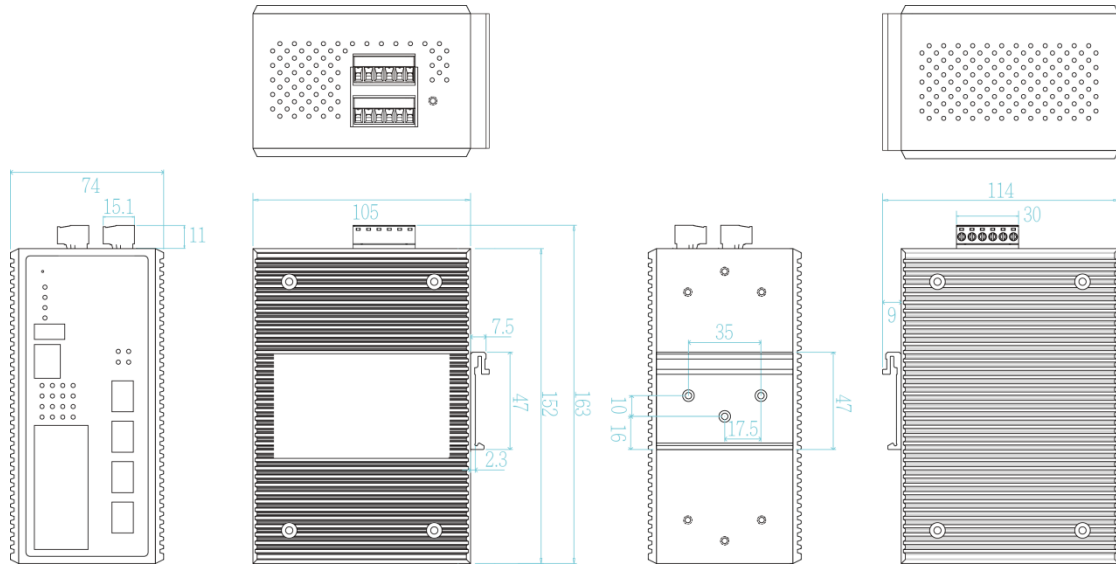

**HV model**

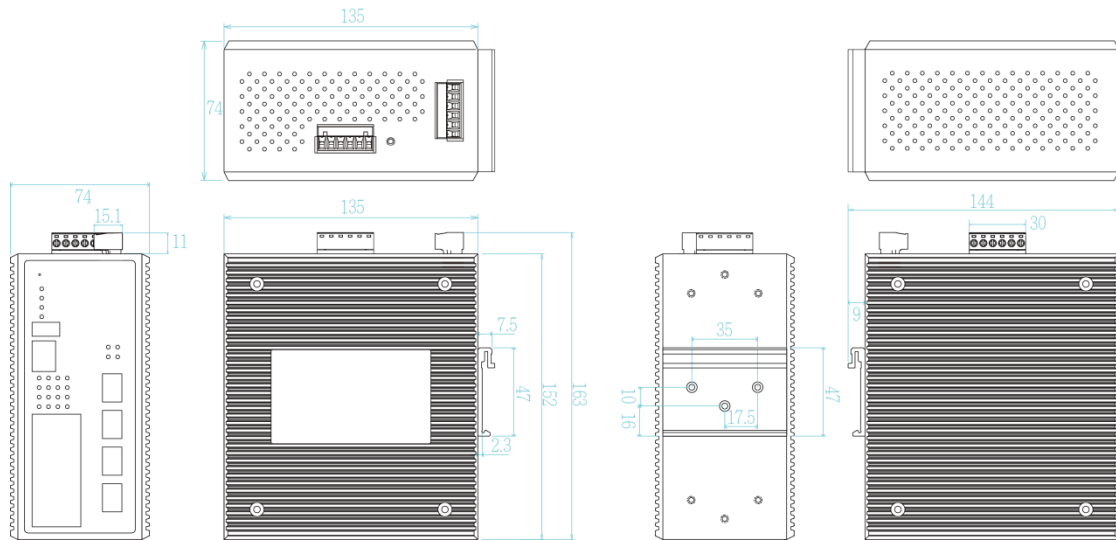

## SPECIFICATION

### Hardware Specification

|                     |   |
|---------------------|---|
| Standards           | IEEE802.3 10Base-T Ethernet<br>IEEE802.3u 100Base-TX<br>IEEE802.3ab 1000Base-T Ethernet<br>IEEE802.3z Gigabit fiber<br>IEEE802.3x Flow Control and Back Pressure<br>IEEE802.3ad Port trunk with LACP<br>IEEE802.1d Spanning Tree<br>IEEE802.1w Rapid Spanning Tree<br>IEEE802.1s Multiple Spanning Tree<br>IEEE802.3ad Link Aggregation Control Protocol (LACP)<br>IEEE802.1AB Link Layer Discovery Protocol (LLDP)<br>IEEE802.1X User Authentication (Radius)<br>IEEE802.1p Class of Service<br>IEEE802.1Q VLAN Tag<br>IEEE1588 Precision Time Protocol v2 |
| Switch Architecture | Back-plane (Switching Fabric): 24Gbps   |
| Transfer Rate       | 14,880pps for Ethernet port<br>148,800pps for Fast Ethernet port<br>1,488,000pps for Gigabit Ethernet / Gigabit Fiber port  |
| CPU                 | Marvell 800Mhz  |
| RAM                 | 256M Byte   |
| Flash               | 128M Byte   |
| Mac Address         | 16K MAC address table   |
| Jumbo frame         | 10KB on all ports   |
| Connectors          | 10/100/1000T: 8 x ports RJ-45 with Auto MDI/MDI-X function<br>Mini-GBIC: 4 x 1000 SFP socket with DDM<br>RS-232 connector: RJ-45 type<br>USB for configuration restore/backup<br>Power & Relay connector: 1 x 6-pole terminal block<br>DIDO : 1 x 6-pole terminal block   |
| Network Cable       | 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable<br>EIA/TIA-568 100-ohm (100m)<br>100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable<br>EIA/TIA-568 100-ohm (100m)<br>1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable<br>EIA/TIA-568 100-ohm (100m)   |
| Optical Cable       | <b>1.25Gbps:</b><br>Multi mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm)<br>Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm)<br><b>WDM 1.25Gbps:</b><br>Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm)  |
| Protocol            | CSMA/CD   |
| LED                 | Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red)<br>Ethernet port: Link/Activity (Green), Speed (Green); Mini-GBIC: Link/Activity (Green)<br>R.M. indicator (Green)  |
| DI/DO               | 2 Digital Input (DI) :<br>Level 0: -30~2V / Level 1: 10~30V   |

|                       |   |
|-----------------------|---|
|                       | Max. input current:8mA<br>2 Digital Output(DO): Open collector to 40 VDC, 200mA   |
| Operating Humidity    | 5% ~ 95% (Non-condensing)   |
| Operating Temperature | -20°C~60°C / -4°F~140°F (Standard model)<br>-40°C~75°C / -40°F~167°F(-E model)  |
| Storage Temperature   | -40°C~85°C / -40°F~185°F  |
| Power Supply          | Dual 18~57VDC (Standard model)<br>Single 90~305VAC/120~430VDC (HV model)  |
| Power Consumption     | 10W   |
| Case Dimension        | Metal case. IP-30,<br>74 (W) x 105 (D) x 152 (H) mm (Standard model)<br>74 (W) x 135 (D) x 152 (H) mm (HV model)  |
| Weight                | 900 g   |
| Installation          | DIN Rail and Wall Mount** Design  |
| EMI & EMS             | FCC Class A,<br>CE EN55032 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE N61000-4-8, EN61000-4-11 |
| Stability Testing     | IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock),<br>IEC60068-2-6 (Vibration)   |
| MTBF                  | 635,105 (Hrs)   |
| Warranty              | 5 years   |

### Software Specification

|                            |   |
|----------------------------|---|
| Management                 | SNMP v1 v2c, v3/ Web/Telnet/CLI   |
| SNMP MIB                   | RFC 1215 Traps MIB*,<br>RFC 1213 MIBII<br>RFC 1158 MIBII<br>RFC 1157 SNMP MIB*,<br>RFC 1493 Bridge MIB*,<br>RFC 1573 IF MIB<br>RFC 2674 VLAN MIB,<br>Partial RFC 1757 RMON,<br>RFC 2674 Q-Bridge MIB*, Bridge MIB*,<br>LLDP MIB*<br>RSTP MIB*<br>Private MIB                  |
| ITU G.8032                 | Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (basic mode)<br>Support various ring/chain topologies<br>Includes train ring<br>Enhanced G.8032 ring configuration with ease  |
| User friendly UI           | <ul style="list-style-type: none"> <li>■ Auto topology drawing</li> <li>■ Topology demo</li> <li>■ Auto configuration for G.8032(auto mode) for single ring</li> <li>■ DDM threshold monitoring with dB values***</li> <li>■ Complete CLI for professional setting</li> </ul> |
| Port Trunk with LACP       | LACP Port Trunk: 8 Trunk groups/Maximum 8 trunk members   |
| LLDP                       | Supports LLDP to allow switch to advise its identification and capability on the LAN  |
| CDP                        | Cisco Discovery Protocol for topology mapping   |
| Environmental Monitoring** | System status for input voltage, current and ambient temperature to be shown in GUI and sent alerting if any abnormal status(-M models)   |
| VLAN                       | Port Based VLAN<br>IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to   |

|                        |  |
|------------------------|--|
|                        | 4096.)<br>GVRP*, QinQ*, QoS QinQ*  |
| IPv6/4                 | Present  |
| Spanning Tree          | Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree  |
| Quality of Service     | The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP   |
| Class of Service       | Support IEEE802.1p class of service, per port provides 8 priority queues   |
| QoS by VLAN            | Tagged QoS by VLAN for all devices in the network  |
| IP Security            | Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.  |
| Login Security         | Supports IEEE802.1X Authentication/RADIUS  |
| Port Mirror            | Support 3 mirroring types: *RX, TX and Both packet*  |
| Network Security       | Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.<br>802.1X access control for port based and MAC based authentication/MAC-Port binding<br>Management access control with priority<br>Ingress/Egress ACL L2/L3<br>SSL/ SSH for Management<br>HTTPS for secure access to the web interface<br>TACACS+* for Authentication  |
| IGMP                   | Support IGMP snooping v1,v2,v3; Supports IGMP static route; 1024 multicast groups; IGMP router port ; IGMP query; GMRP*, QinQ*, QoS QinQ*  |
| Static MAC-Port Bridge | Static multicast forwarding forward reversed<br>IGMP flow with multicast packets binding with ports for IP surveillance application  |
| Bandwidth Control      | Support ingress packet filter and egress packet limit.<br>The egress rate control supports all of packet type.<br>Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet.<br>The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit. |
| RTC                    | Built-in Real Time Clock to keep track of time   |

|                                   |  |
|-----------------------------------|--|
|                                   | always   |
| Flow Control                      | Supports Flow Control for Full-duplex and Back Pressure for Half-duplex  |
| System Log                        | Supports System log record and remote system log server  |
| SMTP/Text SMS                     | Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS text alert via mobile   |
| Relay Alarm                       | Provides one relay output for port breakdown, power fail and alarm.<br>Alarm Relay current carry ability: 1A @ DC24V   |
| Protection                        | <ul style="list-style-type: none"> <li>■ Miss-wiring avoidance</li> <li>■ Repowered auto ring restore</li> <li>■ Loop protection</li> </ul>  |
| SNMP Trap                         | Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> <li>● Device cold start</li> <li>● Authorization failure</li> <li>● Port link up/link down</li> <li>● DI/DO open/close</li> <li>● Typology change(ITU ring)</li> <li>● PoE ping failure</li> <li>● Power failure</li> <li>● Environmental abnormal**</li> </ul> |
| DHCP                              | Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based/VLAN based DHCP distribution (DHCP relay agent)   |
| Mac based DHCP Server             | Assign IP address by Mac that can include dumb switch in DHCP network  |
| DNS                               | Provide DNS client feature and support Primary and Secondary DNS server.   |
| SNTP                              | Supports SNTP v4 to synchronize system clock in Internet   |
| Firmware Update                   | Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade; Lantech™ InstaConfig** for multiple upgrade   |
| Configuration upload and download | Supports text configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; USB for edited restoration and auto backup   |
| IfAlias                           | Each port allows an alphabetic string of 128-byte assigned as its own unique name via the SNMP or CLI interface  |

\*Future release  
\*\*Optional  
\*\*\*Optional DDM SFP required

## ORDERING INFORMATION

- **IGS-5408GSFP.....P/N: 8350-813**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch; -20°C to 60°C; Dual 24/48VDC
- **IGS-5408GSFP-E.....P/N: 8350-815**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch; -40°C to 75°C; Dual 24/48VDC
- **IGS-5408GSFP-M.....P/N: 8350-814**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch w/Monitoring sensor; -20°C to 60°C; Dual 24/48VDC
- **IGS-5408GSFP-M-E.....P/N: 8350-816**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch w/Monitoring sensor; -40°C to 75°C; Dual 24/48VDC
- **IGS-5408GSFP-HV.....P/N: 8350-848**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch; -20°C to 60°C; Single 90~305VAC/120~430VDC
- **IGS-5408GSFP-HV-E.....P/N: 8350-849**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch; -40°C to 75°C; Single 90~305VAC/120~430VDC
- **IGS-5408GSFP-HV-M.....P/N: 8350-8481**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch w/Monitoring sensor; -20°C to 60°C; Single

- 90~305VAC/120~430VDC
- **IGS-5408GSFP-HV-M-E.....P/N: 8350-8491**  
8 10/100/1000T + 4 1000M SFP L2+ Managed Industrial Switch w/Monitoring sensor; -40°C to 75°C; Single  
90~305VAC/120~430VDC

## OPTIONAL ACCESSORIES

### DIN Rail Power

- **MDR-40 Series** 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ;  
Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- **MDR-20 Series** 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ;  
Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

### Mini GBIC (SFP)

- |  |   |
|--|---|
| ■ <b>8330-162X</b> MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver    | ■ <b>8330-196</b> 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550)  |
| ■ <b>8330-163X</b> MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver     | ■ <b>8330-188</b> 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) |
| ■ <b>8330-165X</b> MINI GBIC 1000LX (LC/SM/10KM) Transceiver     | ■ <b>8330-189</b> 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550) |
| ■ <b>8340-0591</b> MINI GBIC 1000LHX (LC/SM/40KM) Transceiver    | ■ <b>8330-186</b> 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310) |
| ■ <b>8330-166</b> MINI GBIC 1000XD (LC/SM/50KM) Transceiver      | ■ <b>8330-187</b> 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550) |
| ■ <b>8330-169</b> MINI GBIC 1000XD (LC/SM/60KM) Transceiver      | ■ <b>8330-180</b> 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310) |
| ■ <b>8330-167</b> MINI GBIC 1000ZX (LC/SM/80KM) Transceiver      | ■ <b>8330-182</b> 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550) |
| ■ <b>8330-170</b> MINI GBIC 1000EZ (LC/SM/120KM) Transceiver     | ■ <b>8330-181</b> 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310) |
| ■ <b>8330-168</b> MINI GBIC 10/100/1000T (100m) Transceiver      | ■ <b>8330-183</b> 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550) |
| ■ <b>8330-197</b> 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) | ■ <b>8330-184</b> 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490) |
| ■ <b>8330-198</b> 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) | ■ <b>8330-185</b> 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550) |
| ■ <b>8330-195</b> 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310)   |   |
- All SFP# ended with D are with DDM function

### Lantech Communications Global Inc.

www.lantechcom.tw  
info@lantechcom.tw

© 2016 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.