

# Nuvo-9000 Series

Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x 2.5GbE/ GbE, USB 3.2 Type-C, Patented Cassette & MeziO™ Interface

## Preliminary



CE FC

### Key Features

- Supports Intel® 12th-Gen Alder Lake Core™ 16C/ 24T 35W/ 65W CPU
- Patented Cassette for PCI/PCIe add-on card accommodation
- Rugged, -25°C to 70°C fanless operation
- Up to 5x 2.5GbE and 1x GigE ports with optional PoE+, supporting 9.5 KB jumbo frame
- 1x USB 3.2 Gen2x2 type-C and 8x USB 3.2/ 2.0 type-A ports
- Supports M.2 Gen4x4 NVMe and 2x SATA ports
- MeziO™ interface for easy function expansion
- VGA/ DVI/ DP triple independent display, supporting 4K2K resolution

Contact Neosys

Get Quote

\*R.O.C Patent No. M456527

## Introduction

Nuvo-9000 series is Neosys' new rugged embedded computer based on Intel® 12th-Gen Alder Lake platform. Benefiting from cutting-edge Intel® 7 photolithography, the latest Core™ desktop processor comes with up to 16 cores and 24 threads and presents an incredible boost of computational performance. Combining the increase of DDR5 memory bandwidth and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.

Nuvo-9000 series inherits Neosys' patented expansion Cassette design to provide great versatility by allowing additional installation of PCIe or PCI add-on cards. There are three expansion Cassette options available for Nuvo-9000 series, the Nuvo-9000E features a single x16 Gen3 PCIe slot; Nuvo-9000DE has dual x16 PCIe slots, and Nuvo-9000P has a single PCI slot. For users who need more flexible storage, Nuvo-9000LP has a 2.5" HDD tray instead of an expansion Cassette to support a hot-swappable 2.5" HDD/SSD.

I/O functions are also comprehensively enhanced. In addition to six 2.5G and Gigabit Ethernet ports with PoE+ PSE option, Nuvo-9000 series features a USB 3.2 Gen2x2 type-C port offering 20 Gbps bandwidth for data exchange with external devices, plus another six USB 3.2 type-A ports for USB3 camera connectivity. It also has an upgraded M.2 Gen4x4 slot to support the latest NVMe SSD to boost disk read/write speed up to 7000 MB/s. For unfulfilled I/O requirements, users can utilize the expansion Cassette to add on function-specific PCIe/ PCI card, the proprietary MeziO interface, and internal mini-PCIe/M.2 interfaces.


With its field-proven thermal design, significant CPU and I/O upgrades, and multiple expansion methods, the Neosys Nuvo-9000 series fits your need for ruggedness, performance, and versatility for a variety of applications.

## Specifications


System Core		Expansion Bus	
<b>Processor</b>	Supporting Intel® 12th-Gen Alder Lake Core™ CPU (LGA1700 socket, 35W/ 65W TDP) - Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE	<b>PCI/PCI Express</b>	1x PCIe x16 slot@Gen3, 8-lanes PCIe signals in Cassette (Nuvo-9002E/ 9006E) 2x PCIe x16 slots@Gen3, 8-lanes PCIe signals in Cassette (Nuvo-9002DE/ 9006DE) 1x PCI slot in Cassette (Nuvo-9002P/ 9006P)
<b>Chipset</b>	Intel® Q670E platform controller hub	<b>Mini PCI Express</b>	1x full-size mini PCI Express socket
<b>Graphics</b>	Integrated Intel® UHD Graphics 770 (32EU)	<b>M.2</b>	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module
<b>Memory</b>	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	<b>Expandable I/O</b>	1x MeziO™ expansion port for Neosys MeziO™ modules
<b>AMT</b>	Supports Intel vPro/ AMT 16.0	<b>Power Supply</b>	
<b>TPM</b>	Supports dTPM 2.0	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8 to 48V DC input
<b>I/O Interface</b>		<b>Remote Ctrl. &amp; LED Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output (Ctrl_In/ GND/ LED_Out)
<b>Ethernet port</b>	1x 2.5G Ethernet by I225 and 1x Gigabit Ethernet by I219 (Nuvo-9002E/ P/ DE) with screw-lock 5x 2.5G Ethernet by I225 and 1x Gigabit Ethernet by I219 (Nuvo-9006E/ P/ DE) with screw-lock	<b>Mechanical</b>	
<b>PoE+</b>	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 (2.5GbE) 100 W total power budget	<b>Dimension</b>	240 mm (W) x 225 mm (D) x 90 mm (H) (Nuvo-9000E/ P series) 240 mm (W) x 225 mm (D) x 110.5 mm (H) (Nuvo-9000DE series)
<b>USB 3.2</b>	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock 4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors 2x USB 3.2 Gen1x1 (5 Gbps) ports in type-A connectors	<b>Weight</b>	4.4 kg (Nuvo-9000E/ P series) TBD (Nuvo-9000DE and Nuvo-9000LP series)
<b>USB 2.0</b>	2x USB 2.0 ports	<b>Mounting</b>	Wall-mount (standard) or DIN-rail mount (optional)
<b>Video Port (Integrated Graphics)</b>	1x VGA, supporting 1920 x 1200 resolution 1x DVI-D, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	<b>Environmental</b>	
<b>Serial Port</b>	2x software-programmable RS-232/ 422/ 485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	<b>Operating Temperature</b>	with 35W CPU -25°C ~ 70°C * with 65W CPU -25°C ~ 70°C *** (configured as 35W TDP) -25°C ~ 50°C *** (configured as 65W TDP)
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out	<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Storage Interface</b>		<b>Humidity</b>	10%~90%, non-condensing
<b>SATA HDD</b>	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	<b>Vibration</b>	Operating, MIL-STD-810G, Method 514.6, Category 4
<b>M.2 NVMe</b>	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD	<b>Shock</b>	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
		<b>EMC</b>	CE/FCC Class A, according to EN 55032 & EN 55035

\* For sub-zero and over 60°C operating temperature, a wide temperature HDD/ SSD/ NVMe is required.

## Appearance

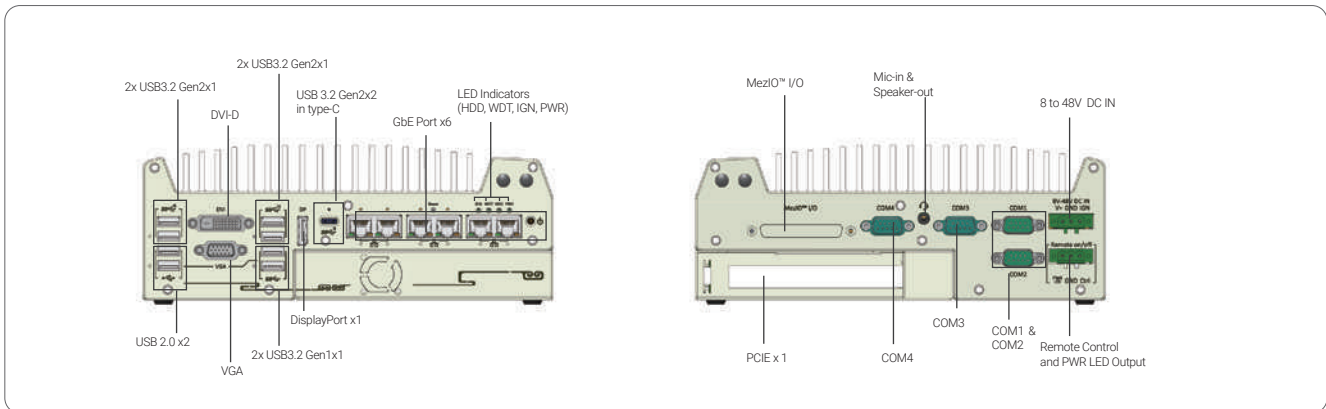

## Dimensions

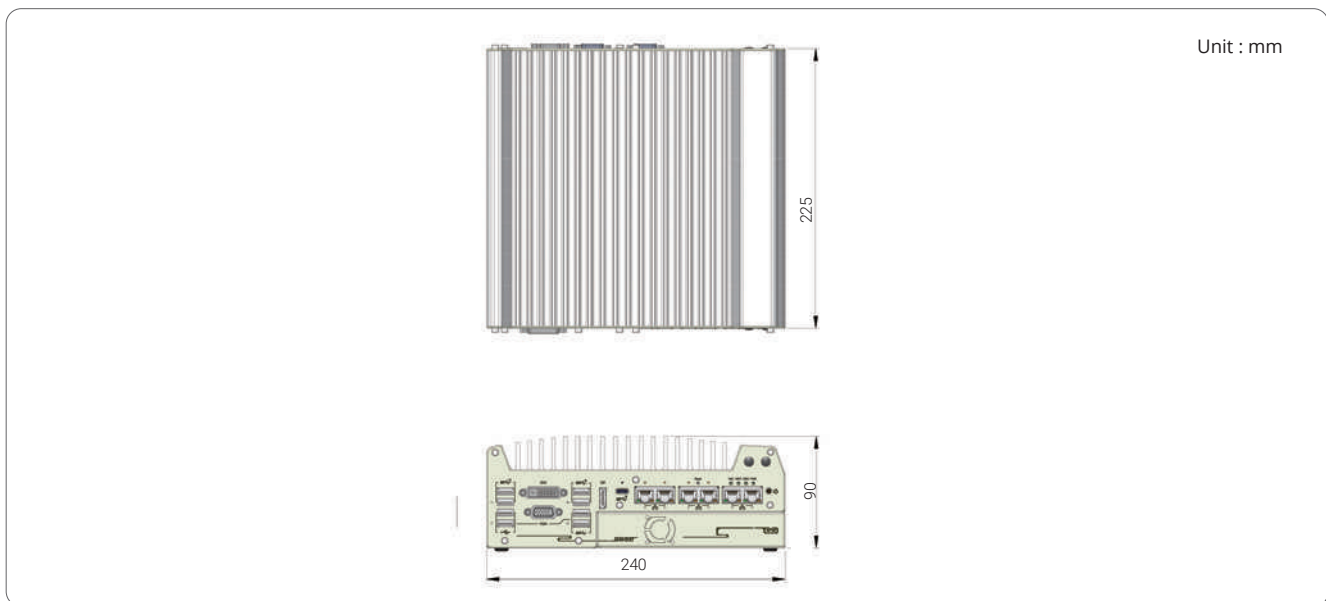

## Ordering Information

Model No.	Product Description
<b>Nuvo-9002E</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x 2.5GbE/ GbEGbE, USB 3.2 Type-C, single-slot PCIe Cassette & MeziO™ Interface
<b>Nuvo-9002DE</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x 2.5GbE/ GbEGbE, USB 3.2 Type-C, dual-slot PCIe Cassette & MeziO™ Interface
<b>Nuvo-9002P</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x 2.5GbE/ GbEGbE, USB 3.2 Type-C, single-slot PCI Cassette & MeziO™ Interface
<b>Nuvo-9006E</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x 2.5GbE/ GbEGbE, USB 3.2 Type-C, single-slot PCIe Cassette & MeziO™ Interface
<b>Nuvo-9006DE</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x 2.5GbE/ GbEGbE, USB 3.2 Type-C, dual-slot PCIe Cassette & MeziO™ Interface
<b>Nuvo-9006P</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x 2.5GbE/ GbEGbE, USB 3.2 Type-C, single-slot PCI Cassette & MeziO™ Interface
<b>Nuvo-9002LP</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x 2.5GbE/ GbEGbE, USB 3.2 Type-C, MeziO™ Interface & 2.5" HDD tray
<b>Nuvo-9006LP</b>	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x 2.5GbE/ GbEGbE, USB 3.2 Type-C, MeziO™ Interface & 2.5" HDD tray
<b>PoE+ Option</b>	Option of 802.3at PoE+ PSE for 2.5GbE port 3 ~ port 6

## Optional Accessories

<b>DINRAIL-O</b>	DIN-rail mount assembly for Nuvo-9000 series
<b>Dmpbr-Nuvo5000_7000</b>	Neosys' patented damping brackets assembly for Nuvo-9000 Series
<b>Fankit-25</b>	Fan assembly for 1-slot Cassette, 25x25x10 mm
<b>PA-160W-OW</b>	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30°C to 70°C. (recommended for 35W CPU)
<b>PA-280W-ET2</b>	280W AC/DC power adapter 24V/ 11.67A; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature: -30°C to 60°C. (recommended for 65W CPU)

### MeziO™ Modules

<b>MeziO™ -C180</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports
<b>MeziO™ -C181</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports
<b>MeziO™ -D220</b>	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
<b>MeziO™ -D230</b>	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
<b>MeziO™ -V20-EP</b>	MeziO™ module with ignition power control function for in-vehicle application
<b>MeziO™ -U4</b>	MeziO™ module with 4x USB 3.1 ports
<b>MeziO™ -G4</b>	MeziO™ module with 4x GigE ports
<b>MeziO™ -G4P</b>	MeziO™ module with 4x IEEE 802.3at PoE+ ports

Only Nuvo-9006E-PoE, Nuvo-9006P-PoE and Nuvo-9006DE-PoE support MeziO-G4P